



DEKOMA®

arsen

# arsen




Grey 60



Pewter 20



Black 78



White 13



Fog 65



Raffia 23



Mushroom 66



Pearl 62




Ivory 11




Champagne 10



Linen 86



Biscuit 40




Latte 44




Praline 41



Castor 61



Chinchilla 63



Nut 21



Espresso 45



Sage 82



Jade 84




Pine 80



Sesame 52



Seagrass 85



Thyme 87



Toast 14




Peach 31



Orange 37




Honey 50




Pheasant 46




Rust 38



Toffee 43




Autumn 42




Strawberry 39




Coral 32



Vino 33




Raspberry 35



Burgundy 30



Azure 83



Turquoise 71



Grass 81



Sunflower 51



Heather 05



Peony 92




Eggplant 02



Sky 72




Lavender 01



Zephyr 76




Blue 70



Cloud 77



Cobalt 75

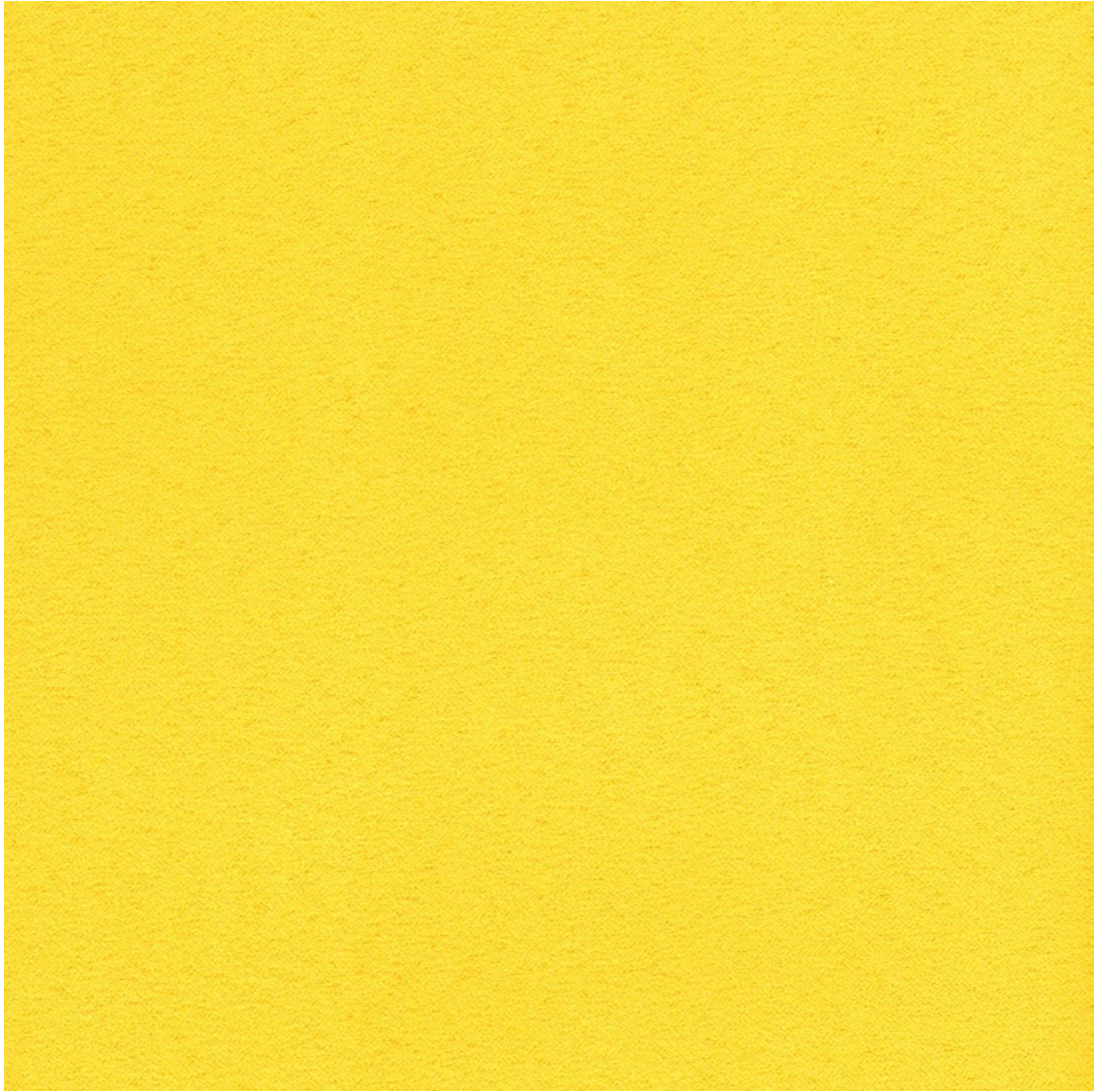

|                                          |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |           |
|------------------------------------------|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| name                                     |                                           | ARSEN                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |           |
| composition                              |                                           | 95% PL, 5% CO                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |           |
| weight ±                                 |                                           | 285 g/m²                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |           |
| usable width ±                           |                                           | 138 cm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |           |
| abrasion resistance<br>Martindale cycles | EN ISO 12947-2                            | 50 000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |           |
| colour fastness to light (1-8)           | EN ISO 105-B02                            | 4-5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |           |
| colour fastness to rubbing (1-5)         | EN ISO 105-X12                            | wet 3-4<br>dry 4-5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |           |
| seam slippage                            | EN ISO 13936-2                            | ↑<br>2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | →<br>2 mm |
| shrinkage                                | EN ISO 6330<br>EN ISO 3759<br>EN ISO 5077 | 1,5 %                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |           |
| pilling (1-5)                            | EN ISO 12945-2                            | 4-5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |           |
| flame retardant standards                | BS 5852<br>US Cal. Bull. 117              | 0 (when using FR foam 35-36 kg/m³)<br>Passed                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |           |
| type                                     |                                           | upholstery<br>decorative                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |           |
| cleaning                                 |                                           |       Iron on reverse. |           |

legend

PL - Polyester  
CO - Cotton

Colour shades may slightly vary from dye-lot to dye-lot.  
For more details, visit our website [dekoma.eu](http://dekoma.eu)



upholstery



decorative



water  
repellent

