

DEKOMA®



robin



# robin



Snow 21



Pearl 22



Greige 19




Rattan 24




Taupe 11




Sky 37



Quartz 47




Petal 48



Limestone 10



Hydro 38



Teal 36




Iris 46




Grape 45




Rabbit 08



Denim 41




Shale 01



Pewter 06




Pinecone 04




Pepper 05



Shark 07

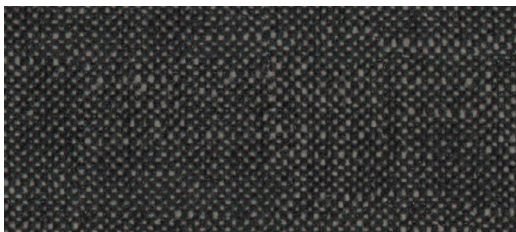

Gargole 02

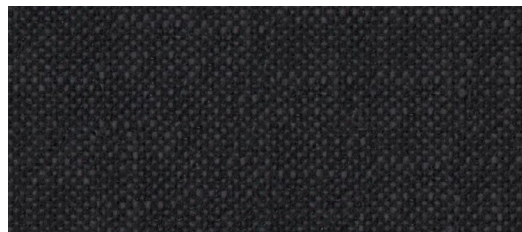

Onyx 03

|                                          |                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                     |           |
|------------------------------------------|------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| name                                     |                                                                  | ROBIN                                                                                                                                                                                                                                                                                                                                                                                                                               |           |
| composition                              |                                                                  | 59% PL, 41% CO                                                                                                                                                                                                                                                                                                                                                                                                                      |           |
| weight ±                                 |                                                                  | 458 g/m²                                                                                                                                                                                                                                                                                                                                                                                                                            |           |
| usable width ±                           |                                                                  | 142 cm                                                                                                                                                                                                                                                                                                                                                                                                                              |           |
| abrasion resistance<br>Martindale cycles | EN ISO 12947-2                                                   | 100 000                                                                                                                                                                                                                                                                                                                                                                                                                             |           |
| colour fastness to light (1-8)           | EN ISO 105-B02                                                   | 5                                                                                                                                                                                                                                                                                                                                                                                                                                   |           |
| colour fastness to rubbing (1-5)         | EN ISO 105-X12                                                   | wet 4<br>dry 4-5                                                                                                                                                                                                                                                                                                                                                                                                                    |           |
| seam slippage                            | EN ISO 13936-2                                                   | ↑<br>3                                                                                                                                                                                                                                                                                                                                                                                                                              | →<br>3 mm |
| pilling (1-5)                            | EN ISO 12945-2                                                   | 4                                                                                                                                                                                                                                                                                                                                                                                                                                   |           |
| pilling (1-5)                            | EN ISO 12945-2                                                   | 4                                                                                                                                                                                                                                                                                                                                                                                                                                   |           |
| flame retardant<br>standards             | BS 5852<br>BS 5852<br>US Cal. Bull. 117<br>NFPA 260<br>FMVSS 302 | 0<br>1*<br>Passed<br>Passed<br>Passed                                                                                                                                                                                                                                                                                                                                                                                               |           |
| type                                     |                                                                  | upholstery                                                                                                                                                                                                                                                                                                                                                                                                                          |           |
| cleaning                                 |                                                                  |      |           |

legend

PL - Polyester  
CO - Cotton

Colour shades may slightly vary from dye-lot to dye-lot.  
For more details, visit our website [dekoma.eu](http://dekoma.eu)



upholstery



decorative



standard  
100

