


DEKOMA®

cavo

cavo



Vanilla Ice 01



Moonbeam 21



Oatmeal 22




Trench Coat 23



Cornstalk 24



Mojave Desert 04



Sahara Sun 66



Curry 25



Pale Blush 41



Calendula 62



Tobacco Brown 26



Winterberry 42



True Red 31




Burnt Brick 32




Molten Lava 33




Golden Poppy 50




Algiers Blue 82




Baltic 75




Oil Blue 83



Glacier 81




Frosty Spruce 74




Mint Green 67




Vineyard Green 77



Loden Frost 78



Dark Citron 72



Kiwi Colada 71




Blue Quartz 84




Satellite 61




Gray Flannel 12



Elephant Skin 11




Dusky Green 73




Blue Graphite 03



Grisaille 14




Thunderstorm 91




Canteen 27




Turkish Coffee 28




Spellbound 85



Pinecone 92




Stormy Weather 13



Martime Blue 69



Black 15

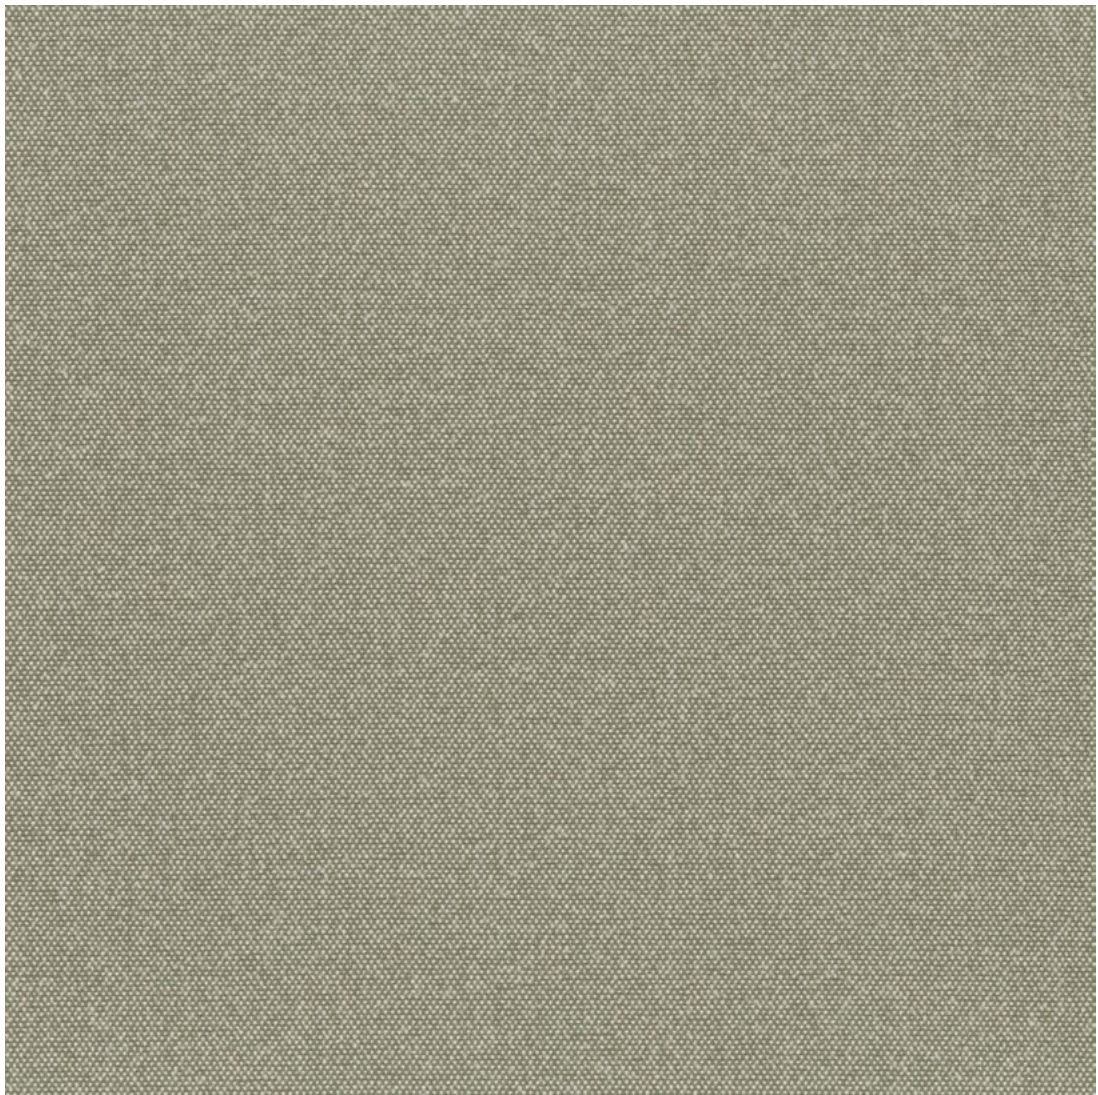

name

CAVO

composition

100% TREVIRA CS

weight ±

330 g/m²

usable width ±

143 cm

abrasion resistance
Martindale cycles

EN ISO 12947-2

45 000

colour fastness to light (1-8)

EN ISO 105-B02

5-6

colour fastness to rubbing (1-5)

EN ISO 105-X12

wet 3-4
dry 4-5

seam slippage

EN ISO 13936-2

↑	→	
1	1	mm

pilling (1-5)

EN ISO 12945-2

4

flame retardant standards

DIN 4102
NFP 92-507
EN 13773
BS 5867
EN 1021
BS 5852
BS 5852
IMO FTPC

B1
M1
Class 1
Part 2 Type C
1; 2
0; 1
Crib 5 (when using FR foam 50 kg/m³)
Part 8 (when using FR foam 36 kg/m³)

acoustic properties

EN ISO 354
EN ISO 11654
Class C, α_w=0,75

type

upholstery
curtains

cleaning



legend

TREVIRA CS - Inherent flame retardant fibre

Colour shades may slightly vary from dye-lot to dye-lot.
For more details, visit our website dekoma.eu

flame
retardant

upholstery



curtains



decorative



acoustic

standard
100